## SWK IP54 - Wall mounted cabinets 19"




Wall mounted | IP 54 | Indoor usage




**Use:** cabinets with increased tightness, perfect for dusty or humid places. They are recommended for installation in production facilities and places with high pollution levels.

## **Construction characteristics:**

- made of DC01 steel
- poliuretan seal
- 2 filter inserts included
- IP54 ventilation grates
- · toughened glass



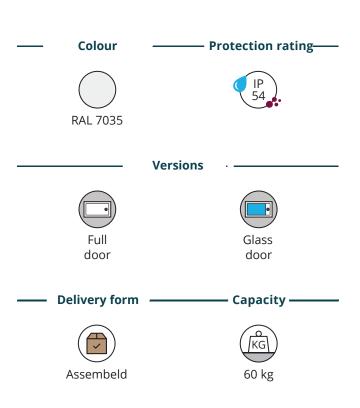

Application

Indoor

**Optional:** SWK-MULTIGATE

Product code	<b>Usable height</b> U x 44,45 mm	Dimentions (mm)			Usable depth	Load	Door		Application
			height	depth	(mm)	capacity	full door	glass door	Indoor
SWK19-6U-40-DP-W	- - 6U	600	335	400	340	- 60	<b>Ø</b>		0
SWK19-6U-40-DS-W								0	<b>Ø</b>
SWK19-6U-60-DP-W				600	540		<b>Ø</b>		<b>Ø</b>
SWK19-6U-60-DS-W								<b>Ø</b>	0
SWK19-9U-40-DP-W	9U	600	470	400	340	60	<b>Ø</b>		0
SWK19-9U-40-DS-W								<b>②</b>	•
SWK19-9U-60-DP-W				600	540		•		•
SWK19-9U-60-DS-W								<b>②</b>	•
SWK19-12U-40-DP-W	- 12U	600	605	400	340	- 60	<b>②</b>		<b>Ø</b>
SWK19-12U-40-DS-W								<b>Ø</b>	<b>Ø</b>
SWK19-12U-60-DP-W				600	540		<b>Ø</b>		0
SWK19-12U-60-DS-W								<b>②</b>	<b>O</b>
SWK19-15U-40-DP-W	- 15U	600	737	400	340	60	•		<b>Ø</b>
SWK19-15U-40-DS-W								<b>②</b>	•
SWK19-15U-60-DP-W				600	540		•		•
SWK19-15U-60-DS-W								<b>②</b>	•
SWK19-18U-40-DP-W	- 18U	600	870	400	340	60	<b>Ø</b>		•
SWK19-18U-40-DS-W								<b>②</b>	0
SWK19-18U-60-DP-W				600	540		<b>Ø</b>		<b>O</b>
SWK19-18U-60-DS-W								0	0
SWK19-22U-60-DP-W	- 22U	600	1048	600	540	80	<b>②</b>		<b>O</b>
SWK19-22U-60-DS-W								<b>Ø</b>	•



Optionally: SWK-DEKD



